

# High voltage tester up to 36 kV AC/DC Two-pole



# Type overview high voltage tester up to 36 kV

## MultiSafe HS 5




- Compact high voltage tester
- Ideal for narrow power stations
- Voltage tester for AC and DC

## MultiSafe HS 11



- Universally applicable
- Ideal for all types of switchgears
- Voltage tester for AC and DC

## MultiSafe HS 36

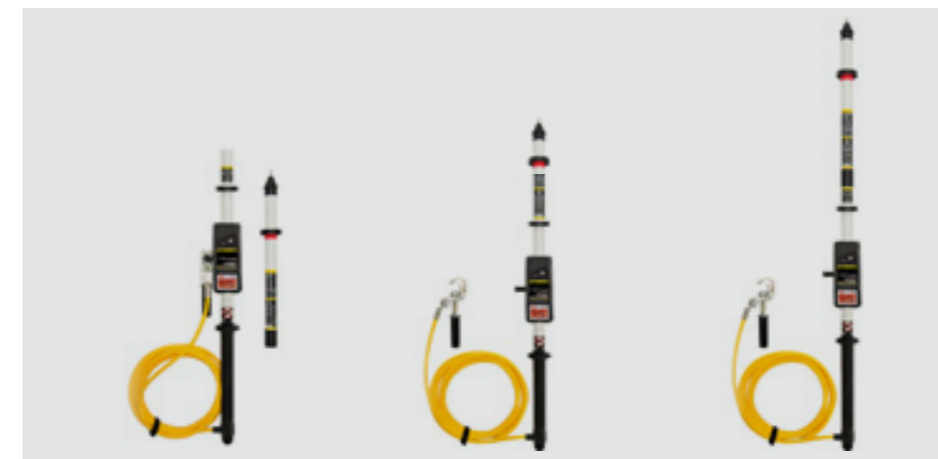

- Wide measuring range
- Large illuminated LCD
- Voltage tester for AC and DC

	HS 5	HS 5MA	HS 5UK
Nominal voltage range	50 - 5 000 V AC 50 - 7 000 V DC		
Voltage warning LED red / green		■	
LCD-backlighted red / green		■	
360° LED indication red / green			
Voltage indication with value		■	
Acoustic voltage warning		■	
Integrated self-test		■	
Frequency indication		■	
Test distance, handle - red limiting mark	190 mm		
Transportlength	550 mm		
Weight	0,54 kg	0,70 kg	1,30 kg
For grounded voltages		■	
For ungrounded voltages	■		
Ground connection by		Magnet	Universal clamp
For indoor installations		■	
For outdoor installations			
Power supply	Batterie 9V 6LR61		
Article number	89300	89331	89330

	HS 11	HS 11MA	HS 11UK
Nominal voltage range	50 - 11 000 V AC 50 - 16 000 V DC		
Voltage warning LED red / green		■	
LCD-backlighted red / green		■	
360° LED indication red / green			
Voltage indication with value		■	
Acoustic voltage warning		■	
Integrated self-test		■	
Frequency indication		■	
Test distance, handle - red limiting mark	525 mm		
Transportlength	1150 mm		
Weight	0,96 kg	0,80 kg	1,40 kg
For grounded voltages		■	
For ungrounded voltages	■		
Ground connection by		Magnet	Universal clamp
For indoor installations		■	
For outdoor installations		■	
Power supply	Batterie 9V 6LR61		
Article number	89304	89305	89335

	HS 36	HS 36C	HS 36B
Nominal voltage range	50 - 36 000 V AC 50 - 36 000 V DC		
Voltage warning LED red / green	■	■	■
LCD-backlighted red / green	■	■	■
360° LED indication red / green	■	■	■
Voltage indication with value	■	■	■
Acoustic voltage warning	■	■	■
Integrated self-test	■	■	■
Frequency indication	■	■	■
Test distance, handle - red limiting mark	860 mm	745 mm	860 mm
Transportlength	920 mm demountable	970 mm	1430 mm
Weight	4,10 kg	3,50 kg	3,70 kg
For grounded voltages	■	■	■
For ungrounded voltages			
Ground connection by	Universal clamp		
For indoor installations	■	■	■
For outdoor installations	■	■	■
Power supply	Batterie 6 x AA 1,5V		
Article number	89308	89353	89346